

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
25 March 2004 (25.03.2004)


PCT

(10) International Publication Number  
WO 2004/025121 A1

- (51) International Patent Classification<sup>7</sup>: F04B 39/00
- (21) International Application Number: PCT/KR2003/000576
- (22) International Filing Date: 24 March 2003 (24.03.2003)
- (25) Filing Language: Korean
- (26) Publication Language: English
- (30) Priority Data:  
10-2002-0054690  
10 September 2002 (10.09.2002) KR  
10-2002-0072085  
19 November 2002 (19.11.2002) KR
- (71) Applicant (for all designated States except US): LG ELECTRONICS INC. [KR/KR]; 20, Yoido-Dong, Youngdungpo-Gu, Seoul 150-010 (KR).
- (72) Inventors; and  
(75) Inventors/Applicants (for US only): KIM, Jong-Mog [KR/KR]; 118-903 Dongsung Apt., Sapa-Dong, Changwon, Kyeongsangnam-Do 641-775 (KR). KWON, O-Sup [KR/KR]; LG Dormitory H-309, 14-5 Gaumjung-Dong, Changwon, Kyungsangnam-Do 641-711 (KR).
- (74) Agent: PARK, Jang-Won; Jewoo Bldg. 5th Floor, 200, Nonhyun-Dong, Gangnam-Ku, Seoul 135-050 (KR).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: HERMETIC COMPRESSOR

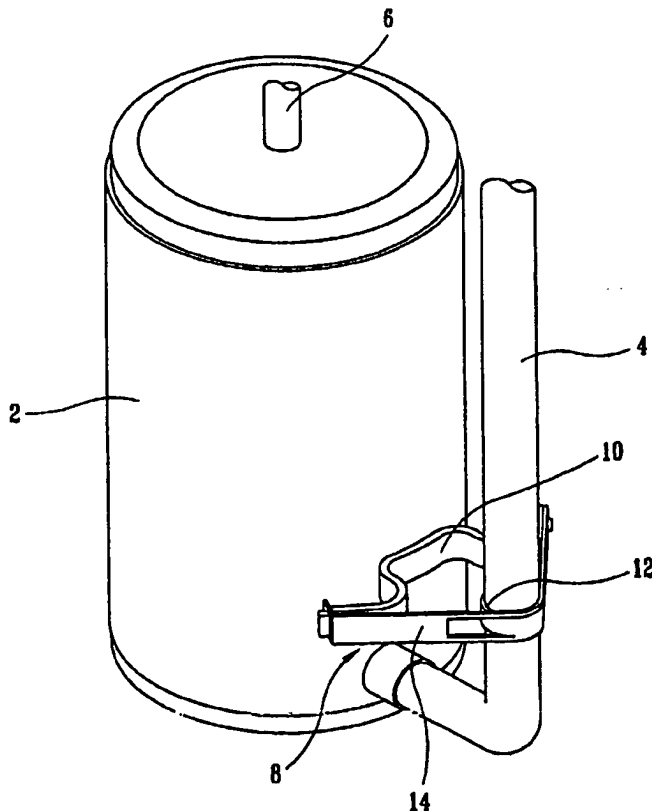

(57) Abstract: A hermetic compressor includes a compressor body, a suction pipe connected at one side of the compressor body to supply a refrigerant to the compressor body, and a suction pipe support unit having a bracket fixed at an outer circumferential surface of the compressor body to support the suction pipe and a strap mounted at both end portions of the bracket and having a bending part supported at an outer circumferential surface of the suction pipe and integrally formed at the central portion of the strap. The number of parts of the suction pipe support unit is decreased, reducing an assembly process, and vibration generated during a compression operation is reduced when being transferred to the suction pipe, preventing damage of the suction pipe and a suction pipe connection portion.

WO 2004/025121 A1